

CSPFD/FDD

Click Wrench with
Wireless Torque Value
Data Transfer



CSPFD100N3X15D with QH15D

R-FHD256

- Transfer and Track all your hand tightened torque values
- Compact transmitter module with large LED light for judgment
- AAA battery operation
- FDD Model features double tightening detection

Preset type Data Transfer Wireless Torque Wrench CSPFD/FDD

Features

- **Transfer actual applied torque data by wireless transmission.**
Robust click type torque wrench is ideal for quick paced assembly.
- **Power-saving design, 24 hours of continuous operation**
Easy battery management using AAA battery.
- **LED Light offers simple visual judgment**
Blue light indicates a good judgment while red alerts the user to a NG judgment.



CSPFD50N3X12D with QH12D



CSPFD25N3X10D with QH10D




● Parameter setting software

Free setting software is provided in Japanese, English, Chinese version.

* Setting box, PC, RS232C cable are required separately



RS232C

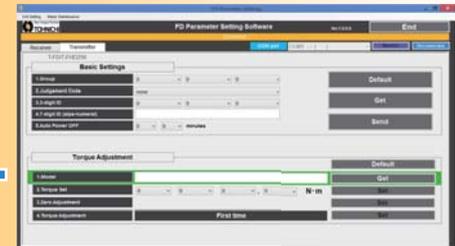

Parameter Setting Software

SB-FH256 Ver.V01A

● Double Tightening Detection function Model: CSPFDD

If the same fastener is tightened twice the second tightening data will be rejected.




Completion of tightening process with Blue signal



LED lamp is lit Red when tightening same bolt which already tightened with required torque.

Configuration example (OK/NG Judgment by external equipment)

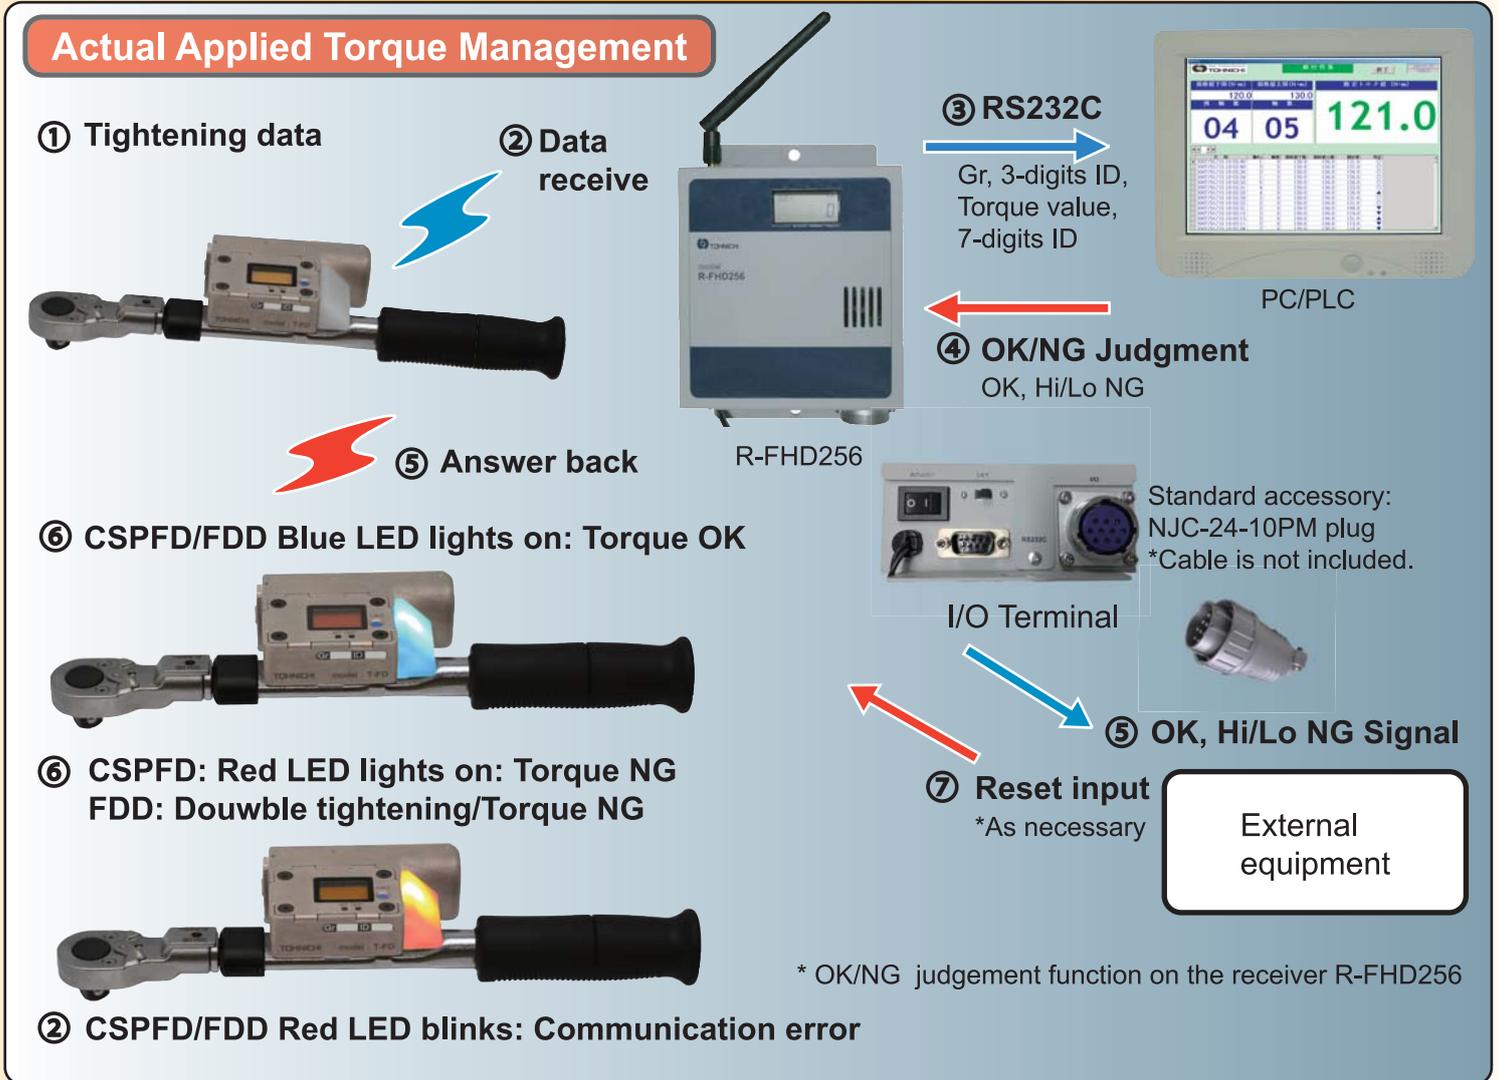

● **Variety of interchangeable head**
Selectable suitable interchangeable head for each application.

● **Special type is also available on your request**



MQSPFD Marking with data transfer type



● **Capable of tool management by torque wrench tester**

Accuracy traceability with calibration by using standard torque wrench tester.



Standard accessory

Protective cover: FD-PCV for FD/FDD



Optional accessory


Adjusting Tool



Part No.	Applicable Models
931	CSPFD25N3
930	CSPFD50N3 - 280N3


Dimensions

■ CSPFD/FDD

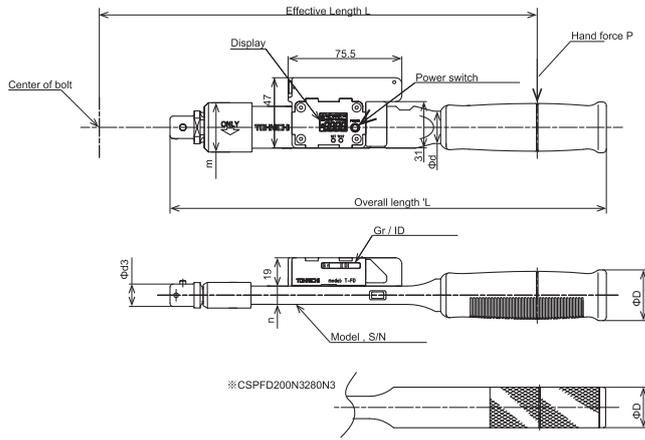

■ R-FHD256

[mm]

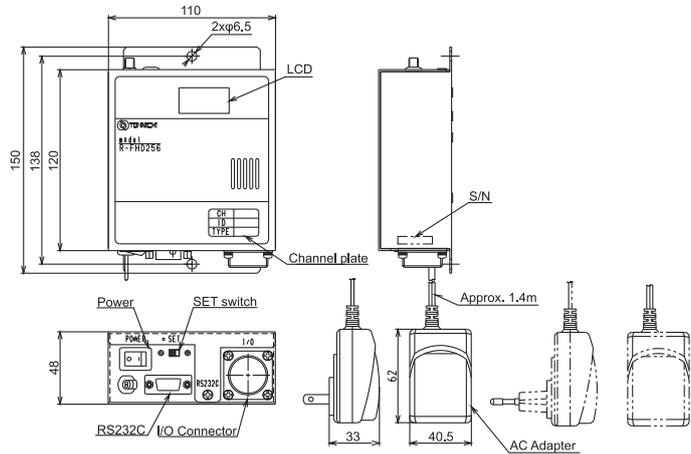

Specifications

Accuracy +/-3%+1digit

Model		N·m		kgf·cm		kgf·m		lbf·in		lbf·ft		L' [mm]	Weight [kg]
FD	FDD	Min.-Max.	1 digit										
CSPFD25N3-10NX10D	CSPFDD25N3-10NX10D	2-10		20-100	1	0.2-1	0.01	20-85	0.5	1.5-7.5		193	0.32
CSPFD25N3NX10D	CSPFDD25N3NX10D	5-25	0.1	50-250	1	0.5-2.5	0.01	50-200	1	3.6-18	0.1	214	0.46
CSPFD50N3NX12D	CSPFDD50N3NX12D	10-50	0.2	100-500	2	1-5	0.02	100-400	2	7.5-36		217	
CSPFD50N3NX15D	CSPFDD50N3NX15D											290	0.65
CSPFD100N3NX15D	CSPFDD100N3NX15D	20-100	0.5	200-1000	5	2-10	0.05	200-850	5	15-75	0.2	349	0.77
CSPFD140N3NX15D	CSPFDD140N3NX15D	30-140		-	-	3-14		-	-	25-100	0.5	429	1.2
CSPFD200N3NX19D	CSPFDD200N3NX19D	40-200	1	-	-	4-20	0.1	-	-	30-150	1	627	1.65
CSPFD280N3NX22D	CSPFDD280N3NX22D	40-280		-	-	4-28		-	-	30-200			

Communication Specifications

Model	Transmitter		Receiver		Setting box
	FD	FDD	R-FHD256	SB-FH256	
Frequency	2.402GHz-2.479GHz, 1 MHz interval, 78 kinds				
Communication System	Spread spectrum (frequency hopping system)				
Modulation System	GFSK				
Group channel	256 (000-255)				
ID	3-digits (000-999), 7-digits (alphanumeric)				
Input/Output			I/Oconnector, RS232C	RS232C	
Power Supply	AAA nickel hydride/Alkaline batteries x 2		AC100V-240V	DC9V alkaline battery x 1	
Antenna	Chip antenna		Dipole antenna		
Temperature in Use	0 - 45°C				
Communication Distance	10 to 20 m				
LCD Display	Torque 3-digits, torque unit, battery level 4 steps		ID 3-digits, Torque 3-digits, Torque Unit	Group 3-digits, ID 3-digits, Judgment code 1-digit	
LED Display	Blinks in Blue: Judgment OK Blinks in Red: Communication error Turns on in Red: Judgment NG		-		Power status

Note Contact Tohnichi for conditions of wireless certification acquisition for each country.



Product movies are available. Visit Tohnichi TV.
<https://www.youtube.com/c/TohnichiTV>

TOHNICHI MFG CO., LTD.
 URL <http://www.global-tohnichi.com>
 E-mail overseas@tohnichi.co.jp
N.V. TOHNICHI EUROPE S.A.
 E-mail tohnichi-europe@online.be
TOHNICHI AMERICA CORP.
 URL <http://www.tohnichi.com>
 E-mail inquiry@tohnichi.com
TOHNICHI SHANGHAI MFG. CO., LTD.
 URL <http://www.tohnichi-sh.com>
 E-mail sales@tohnichi-sh.com

